



July 28, 2016

City of San Diego
Enza Charles
1200 3rd Ave, Suite 1700, MS 51
San Diego, CA

RE: Consent for Fiber Upgrade
Verizon Wireless Site "Naval Hospital"
2145 Park Blvd., San Diego, CA

Dear Customer,

I am contacting you on behalf of Verizon Wireless. In an effort to build the most reliable network, Verizon Wireless (VZW) desires to upgrade the fiber cable at this location. The scope of work will consist of installing a Y-intercept in the right-of-way, then bring fiber through the existing 4" conduit.

Pursuant to the Telecommunications Lease Agreement dated 10/31/2013; please provide your written consent by signing below. Please return via email, one signed copy of this letter to sarah@baseconsultingco.com

Should you have any questions or require additional information, please do not hesitate to contact me.

Sincerely,

Sarah Balderas
Sarah Balderas
Base Consulting

ACKNOWLEDGEMENT: I do hereby grant consent to Verizon Wireless to upgrade fiber cable per the feasibility report dated June 16, 2016.


By: 
Name: **Cybele Thompson**
Title: **Director, Real Estate Assets**
Date: **8/17/16**



FIBER OPTIC FEASIBILITY REPORT



NAVAL HOSPITAL (CRAN)

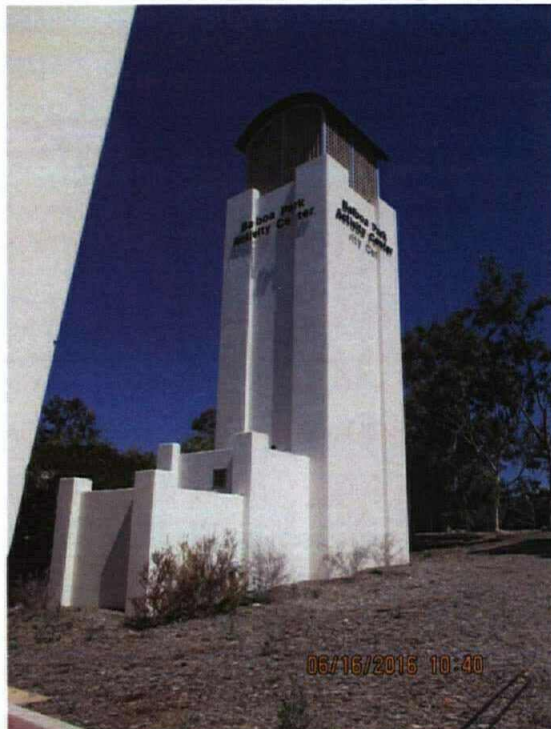

PS#:	250270	Project Number:	20161433427	Site Walk Date:	6/16/2016
Site Address:	2145 Park Blvd, San Diego Ca 92101			Fiber Provider:	Crown Castle
Property Owner:				CIK Contact:	Jaime Ochoa
				VZW Engineer:	Elena Baluyut

VZW Proposed Modify/Upgrade Project Deliverables

1.	No Crown presence on location
2.	Crown intends to install (N) Fiber from (N) Crown HH to (E) VzW Toll bay rack in VzW cell site. Approximate distance 175'
3.	Crown to install (1) (N) Crown HH with stub and cap to property line
4.	VzW to y-intercept from property line to (E) 4" Telco conduit


Verizon Proprietary Information

5.	VzW to run mule tape from (N) Crown HH to VzW cell site
6.	Crown to install (1) (N) Crown FTP in (E) VzW Toll bay rack in VzW cell site
7.	Crown to install (N) Fiber from (N) Crown HH to (E) VzW Toll bay rack in VzW cell site
8.	Work to be completed on Landlord's premises and VzW lease area

Proposed Fiber Pathway


Provider:	Crown Castle
Site Type:	Indoor Shelter
Demarcation:	(N) Crown FTP in VzW Toll Bay Rack

Overall view of fiber path (locations and distances are approximate)


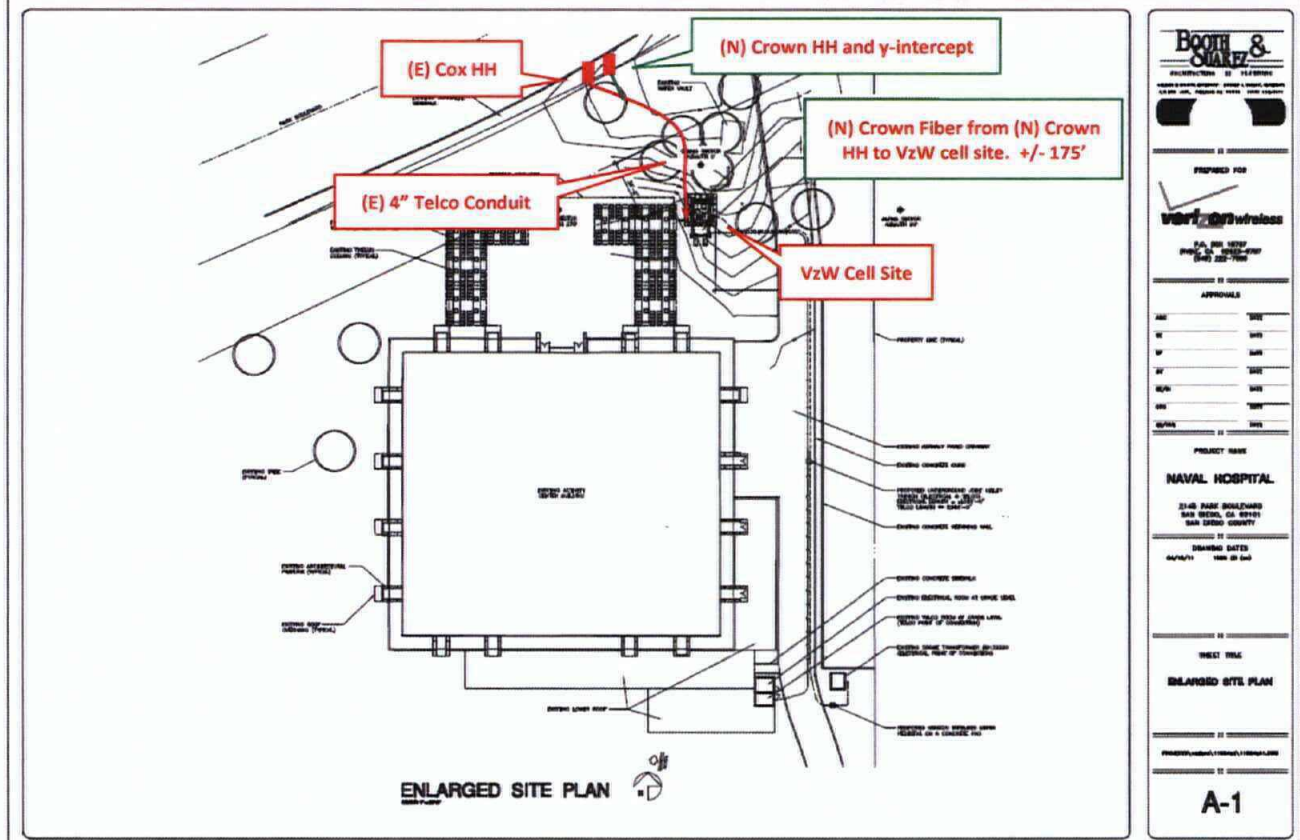


Scope of Work with Details:

- No Crown presence on location
- Crown intends to install (N) Fiber from (N) Crown HH to (E) VzW Toll bay rack in VzW cell site. Approximate distance 175
- Crown to install (1) (N) Crown HH with stub and cap to property line
- VzW to y-intercept from property line to (E) 4" Telco conduit
- VzW to run mule tape from (N) Crown HH to VzW cell site
- Crown to install (1) (N) Crown FTP in (E) VzW Toll bay rack in VzW cell site
- Crown to install (N) Fiber from (N) Crown HH to (E) VzW Toll bay rack in cell site
- Work to be completed on Landlord's premises and VzW lease area

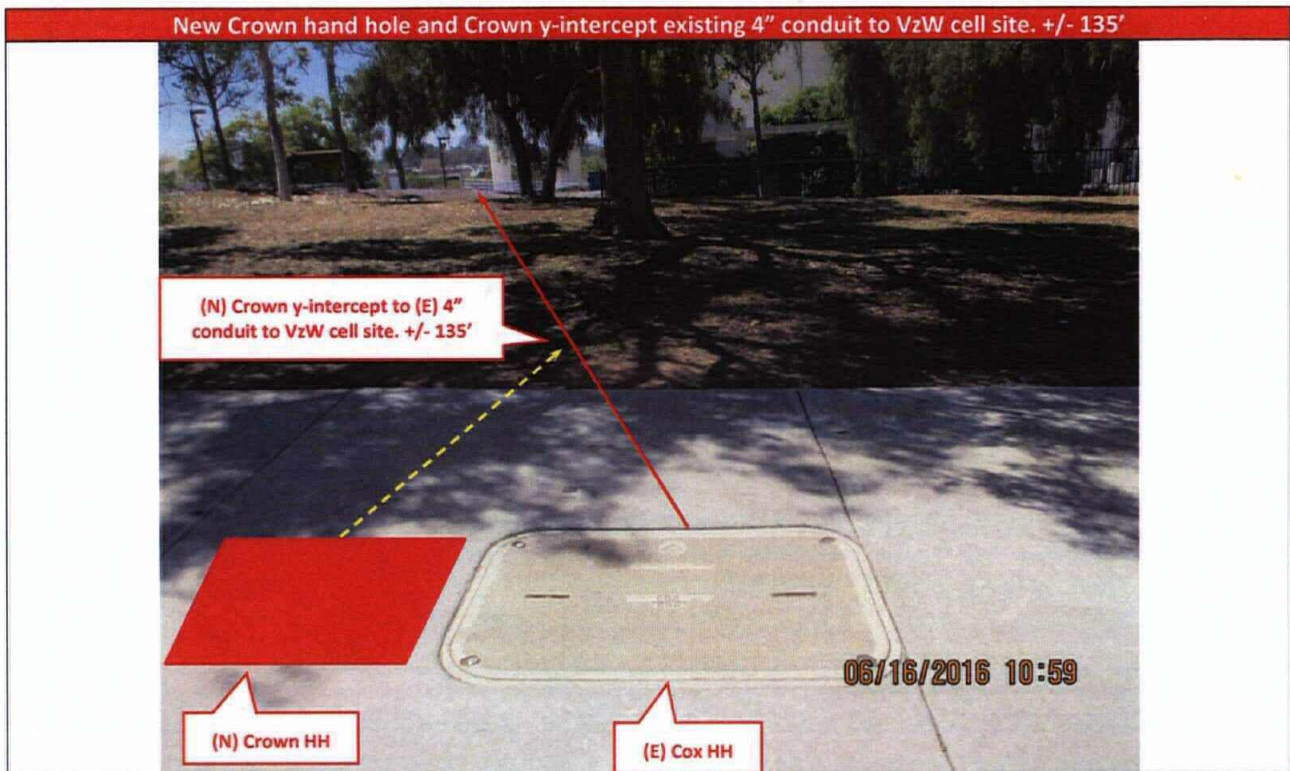

Naval Hospital Fiber Optic Feasibility Report

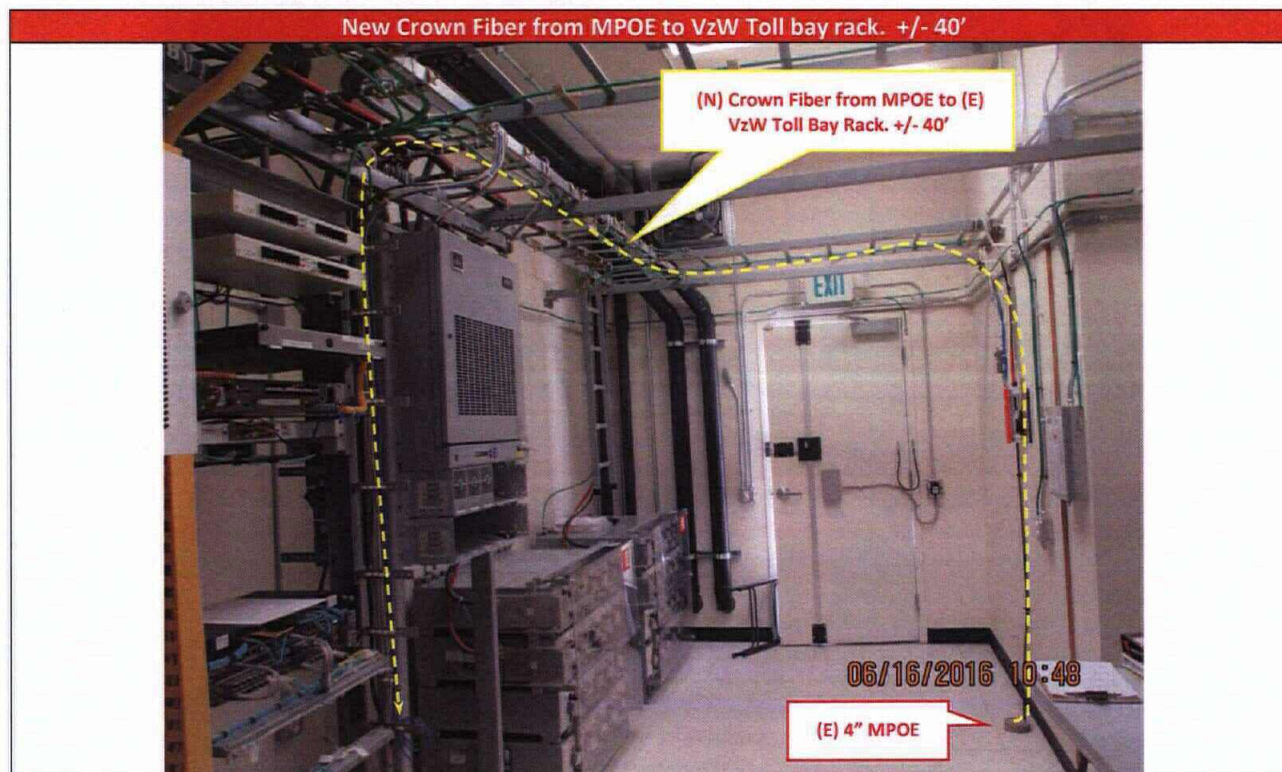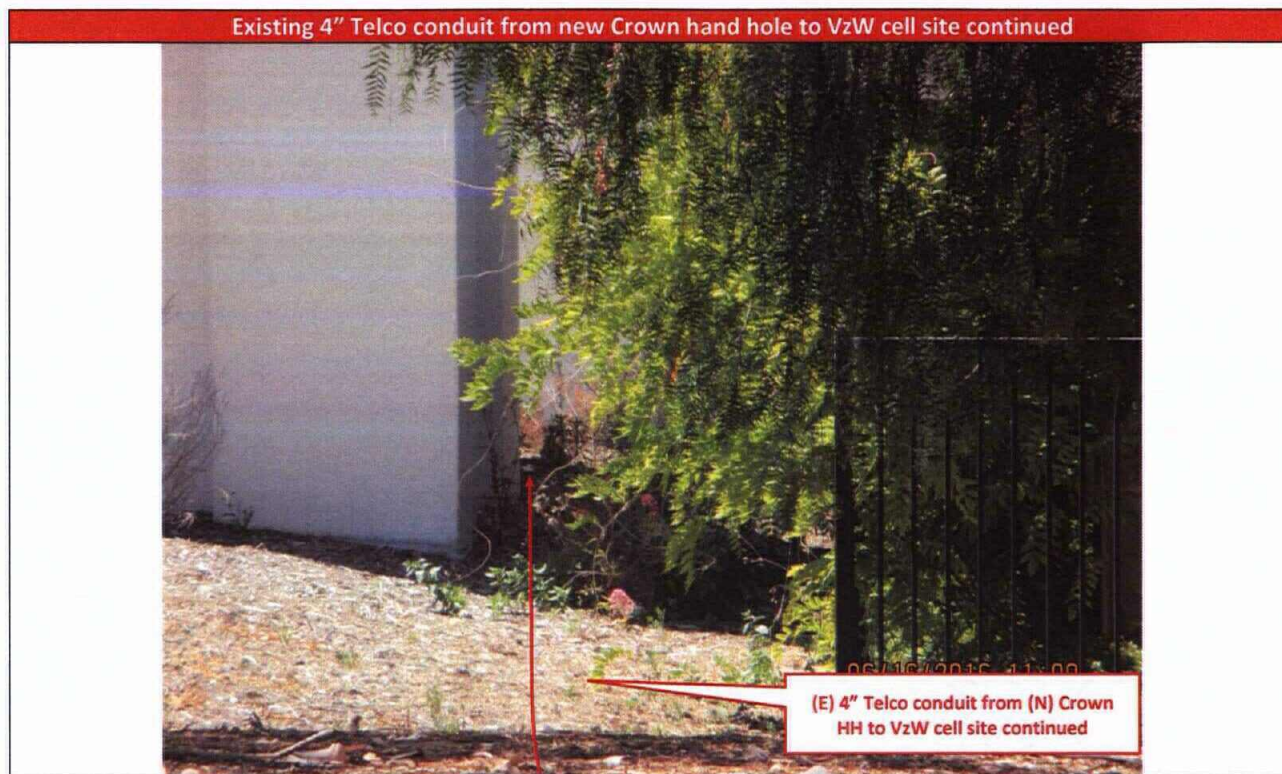

Naval Hospital Fiber Optic Feasibility Report

